


## Analog Camera

# KPC-E700xUB


- 1/3" 960H CCD
- 750TV Lines
- Fixed Lens
- DNR, Privacy Masking, Motion Detection

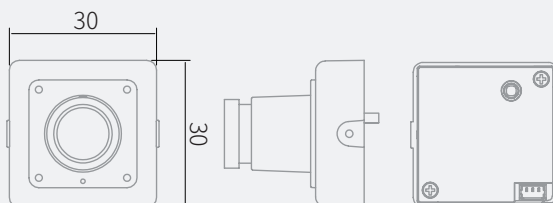

## Analog Camera

# KPC-E700xUB

### Dimensions

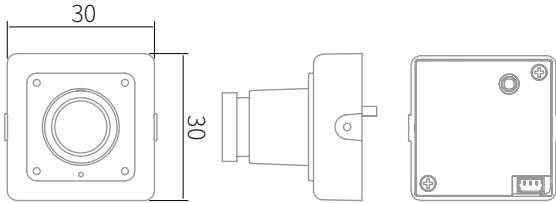

## Specifications

<b>Image Sensor</b>	1/3" 960H SONY Super HAD CCD II
<b>Effective Pixels</b>	NTSC: 976(H) x 494(V) / PAL: 976(H) x 582(V)
<b>Max. Video Resolution</b>	1080p@30(25)fps
<b>Lens</b>	Fixed Board : 3.6mm, Pinhole : 4.3mm
<b>Min. Illumination (AGC Max)</b>	0.1 Lux(F2.0, DSS Off)/(0.03 Lux(DSS On)
<b>S/N Ratio</b>	>50 dB(3DNR On, AGC Off)
<b>Shutter Speed</b>	Auto, 1/25, 1/30, 1/50, 1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/3000, 1/10000
<b>Flickerless</b>	Auto/On/Off
<b>Day / Night</b>	Electronic D/N(option)
<b>White Balance</b>	ATW / PUSH / USER1 / USER2 / ANTI CR / MANUAL / PUSH-LOCK
<b>WDR</b>	D-WDR
<b>BLC</b>	Off / BLC / HLC
<b>DNR</b>	3DNR
<b>DSS</b>	Off / Auto

<b>AGC</b>	6dB - 44.8dB
<b>Other Function(s)</b>	Flip(H/V/HV), W.Pix Mask, Brightness, Contrast, Sharpness, Hue, Gain, Lens Shading, DIS, Defog
<b>Privacy Masking</b>	Yes
<b>Motion Detection</b>	Yes
<b>Transmission Distance</b>	Color 300 m @RG59, BW 500 m @RG59
<b>OSD Control</b>	Built-in Controller / External Control (UTC, RS-485)
<b>OSD Language</b>	English / Spanish / Russian / Portuguese / German / French / Chinese / Japanese
<b>Housing Material</b>	Aluminium
<b>Temperature</b>	Operation: -10°C ~ 50°C (14°F ~ 122°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)
<b>Max. Power Consumption</b>	12VDC 70mA
<b>Dimensions (W x H x D mm)</b>	30 x 30
<b>Weight</b>	Approx. 35 g
<b>Option</b>	KPC-E700xUP1: 3.7mm Pinhole Lens KPC-E700xUP3: 3.7mm Flat Pinole Lens